



**N AU Single Point Loadcell**



Manufactured according to OIML R60 standards

**Description**

- Aluminum alloy
- Combined error =  $\pm 0.02\%$
- Protection class IP65



Capacity from 3 kg to 50 kg

**Technical data**

CAPACITY	kg	IECEx	Ex	EAC	PLATFORM DIMENSION	NET WEIGHT OF LOAD CELL	CODE
	3	•	•	•	250 x 400	0.5	AU3
	6	•	•	•	250 x 400	0.5	AU6
	15	•	•	•	250 x 400	0.5	AU15
	30	•	•	•	400 x 600	0.5	AU30
	50	•	•	•	400 x 600	0.5	AU50
		ON REQUEST					

**Certifications**

CERTIFICATIONS ON REQUEST



ATEX II 1GD (zone 0-1-2-20-21-22)




IECEx (zone 0-1-2-20-21-22)



Complies with the Eurasian Custom Union regulations (Russia, Belarus, Kazakhstan)

## ■ Dimensions (mm)

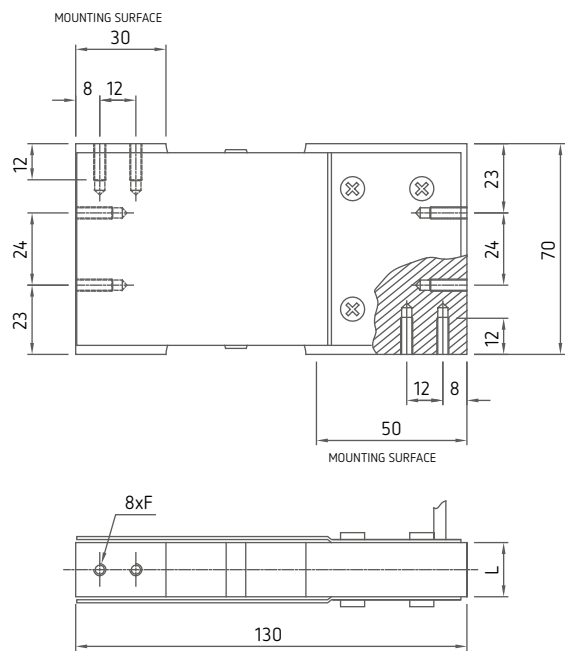

	3 - 6 - 15 kg	30 - 50 kg
L	18	30
F	M4x0.7	M6x1

## ■ Technical features

Material	Aluminum alloy		
Nominal load (E max)	3 - 6 - 15 - 30 - 50 kg		
Combined error	≤±0.02%		
Protection class	IP65		
Rated output	2 mV/V ±10%	Input resistance	410 Ω ±10
Temperature effect on zero	0.0025% °C	Output resistance	350 Ω ±3
Temperature effect on span	0.0025% °C	Zero balance	±2%
Compensated temperature range	-10 °C / +40 °C	Insulation resistance	>2000 MΩ
Operating temperature range	-20 °C / +60 °C	Safe overload (% of full scale)	120%
Creep at nominal load in 30 minutes	0.025%	Ultimate overload (% of full scale)	200%
Max supply voltage without damage	15 V	Deflection at nominal load	0.5 mm

## ■ Electrical connections

Cable length	3 m
Cable diameter	4 mm
Cores	4/6 x 0.20 mm <sup>2</sup>

