




DIMENSIONS

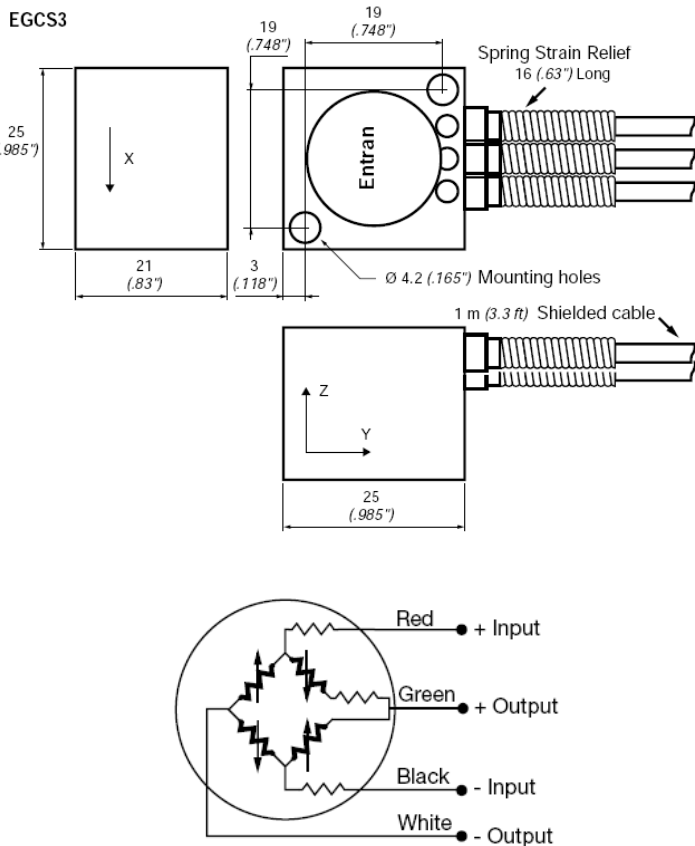

MODEL EGCS3-D TRIAXIAL ACCELEROMETER

SPECIFICATIONS

- ◆ Triaxial, DC Response
- ◆ 10,000 g Overrange Stops
- ◆ $\pm 5g$ to $\pm 5000g$ Dynamic Range
- ◆ Critically Damped

The Model EGCS3-D triaxial accelerometer is available in ranges from $\pm 5g$ through $\pm 5000g$. With over-range limit to $\pm 10,000g$ and spring strain relief, this rugged device is ideal for offshore, downhole and shock testing applications. Its small size and screw mounting ensure ease of installation while its low power requirements and DC output facilitate integration into data acquisition and monitoring systems. The EGCS3 also features CE Conformance to EN 61010-1, EN 50081-1 and EN 50082-1.

FEATURES

- ◆ $\pm 5g$ to $\pm 5000g$ Dynamic Range
- ◆ Heavy Duty, Rugged
- ◆ Static and Dynamic Measurement
- ◆ DC to 4000Hz Frequency Response
- ◆ $\pm 1\%$ Non-Linearity
- ◆ $-40\text{ }^{\circ}\text{C}$ to $+120\text{ }^{\circ}\text{C}$ Temperature Range
- ◆ 10,000g Over-range Protection

APPLICATIONS

- ◆ Blast Testing
- ◆ Machine Control
- ◆ Performance Testing
- ◆ Engine Testing
- ◆ Road Vehicle Testing

MODEL EGCS3-D TRIAXIAL ACCELEROMETER

PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 80Hz and 15Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

Parameters											Notes
DYNAMIC											
Range (g)	±5	±10	±25	±50	±100	±250	±500	±1000	±2500	±5000	
Sensitivity (mV/g)	40	20	8	4	2	0.8	0.4	0.2	0.08	0.04	
Frequency Response min. (Hz)	0-80	0-120	0-240	0-350	0-500	0-750	0-1000	0-1500	0-2000	0-2400	±1/2dB
Frequency Response nom. (Hz)	0-150	0-200	0-400	0-600	0-900	0-1300	0-1750	0-2500	0-3500	0-4000	±1/2dB
Natural Frequency (Hz)	300	400	800	1200	1800	2600	3500	5000	7000	8000	
Non-Linearity (%FSO)	±1	±1	±1	±1	±1	±1	±1	±1	±1	±1	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	
Damping Ratio	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	Nominal
Shock Limit (g)	500	1000	2000	5000	10000	10000	10000	10000	10000	10000	
ELECTRICAL											
Zero Acceleration Output (mV)	±20										Differential
Excitation Voltage (Vdc)	15 (can be used from 2 to 15Vdc but lower excitation voltage will decrease sensitivity accordingly)										
Input Resistance (Ω)	2000										Nominal
Output Resistance (Ω)	1000										Nominal
Insulation Resistance (MΩ)	>100										@50Vdc
Ground Isolation	Isolated from Mounting Surface										
ENVIRONMENTAL											
Thermal Zero Shift	±2.0mV / 50°C (±2.0mV / 100°F)										
Thermal Sensitivity Shift	±2.5% / 50°C (±2.5% / 100°F)										
Operating Temperature Compensated Temperature	-40 to +120°C (-40 to +250°F)										
Storage Temperature	+20 to +80°C (+70 to +170°F), contact factory for other temperature compensation options										
Humidity	-40 to +120°C (-40 to +250°F)										
	Epoxy Sealed										
PHYSICAL											
Case Material	Anodized Aluminum										
Cable	PFA Insulated Leads, Braided Shield, Silicone Jacket										
Weight	<50 grams										
Mounting	Screw Mount										
AWG	#28										
Wiring color code:	+Excitation = Red; -Excitation = Black; +Output = Green; -Output = White										
Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±1/2dB Frequency Response Limit									
Optional accessories:	121	3-Channel Precision Low Noise DC Amplifier									
	140	Auto-zero Inline Amplifier									

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

MODEL EGCS3-D TRIAXIAL ACCELEROMETER

ORDERING INFORMATION

EGCS3 – D – 100 – /Z1/L2M/C

+(70 to +170°F)

| |___ Options, otherwise leave blank

contact factory |_____ Range (100 is 100g)

contact factory

with length in meter

male or equivalent

Example: EGCS3-D-100-/L2M

Model EGCS3, 100g Range, 2 Meter Cable Length

Compensated Temp Ranges:

Standard = +20 to +80°C

Z* = Non standard,

Excitation Voltage:

Standard = 15Vdc

V* = Non standard,

Special Cable Length:

with length in feet

L00F = Replace "00"

L00M = Replace "00"

Connector Wired to Cable:

C = Microtech type

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.