


MODEL 7531A ACCELEROMETER




DIMENSIONS

Standard Dimensions

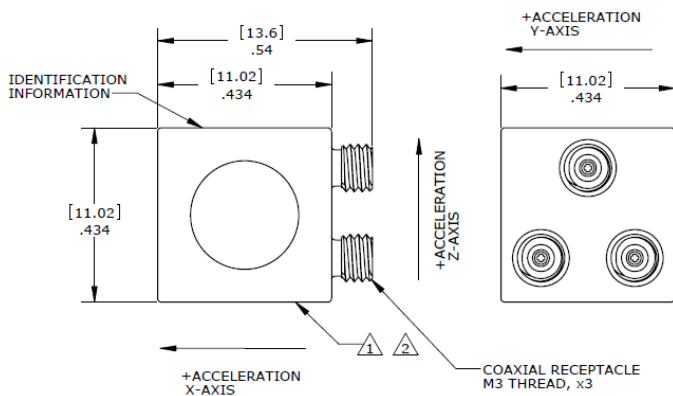

-03 Isolated Case Dimensions

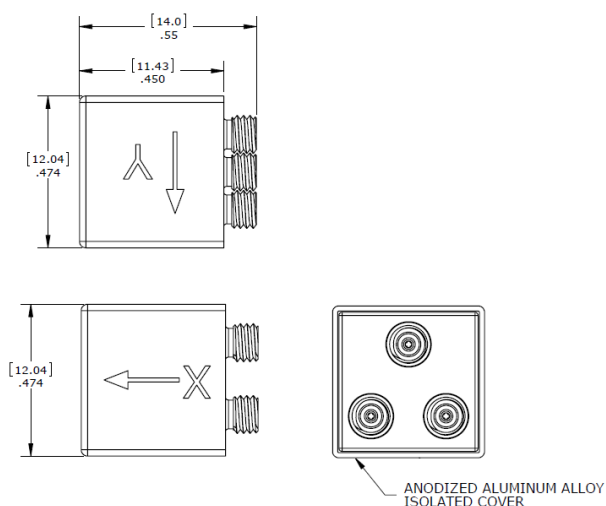

SPECIFICATIONS

- Triaxial Charge Output Accelerometer
- 1.8pC/g output, 10kHz Bandwidth
- Hermetically Sealed, Titanium
- Adhesively Mounted, Light Weight


The Model 7531A is an adhesively mounted triaxial charge mode accelerometer with an operating temperature range to +260°C. The accelerometer is designed for high frequency vibration and shock measurements and offers a wide bandwidth to >10kHz with a nominal charge output of 1.8pC/g. The model 7531A incorporates stable high temperature piezo-ceramic crystals in annular shear mode.

FEATURES

- 1.8pC/g Sensitivity
- Wide bandwidth up to >10kHz
- Isolated Case Option
- Hermetically Sealed
- Annular Shear Mode
- -73°C to +260°C Operating Range
- Stable Temperature Response

APPLICATIONS

- Vibration & Shock Monitoring
- High Temp Applications
- Laboratory Testing
- High Frequency Applications
- Gearbox Vibration Monitoring



PERFORMANCE SPECIFICATIONS



All values are typical at +24°C, 80Hz unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters		Notes
DYNAMIC		
Sensitivity (pC/g)	1.8	Typical
Sensitivity (pC/g)	1.0	Minimum
Frequency Response (Hz) ²	1-7000	±10%
Frequency Response (Hz) ²	0.2-10000	±2dB
Natural Frequency (Hz)	48000	
Non-Linearity (%FSO)	±1/1000g	
Transverse Sensitivity (%)	<5	
Dynamic Range (g) ¹	±5000	
Shock Limit (g)	±10000	
ELECTRICAL		
Capacitance (pF)	240	Nominal
Insulation Resistance (MΩ)	>100	@100Vdc
Grounding	Case Grounded	
ENVIRONMENTAL		
Temperature Response (%)	See Typical Temperature Response Curve	
Operating Temperature (°C)	-73 to +260 (-40 to 125 for -03 Isolated Case Option)	
Storage Temperature (°C)	-73 to +260	
Humidity	Hermetically Sealed, IP67	
PHYSICAL		
Sensing Element	Ceramic (shear mode)	
Case Material	Titanium	
Electrical Connector	M3 Coaxial Receptacle	
Weight (grams)	5.3 (6.6 for -03 option)	
Mounting	Adhesive (Stud Mount Option)	

¹ Operating range over which the accelerometer meets the linearity specifications
² Low-end response of the accelerometer is a function of its associated electronics.

Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±2dB Frequency Response Limit
Optional accessories:	321-XXX	Cable Assembly, M3 to 10-32 (XXX designates length in inches, 10ft standard)
	130	In-Line Charge Converter
	161A	4-Channel PE & IEPE Signal Conditioner
	AC-A04025	Adhesive Mounting Adaptor (for -02 thread option)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

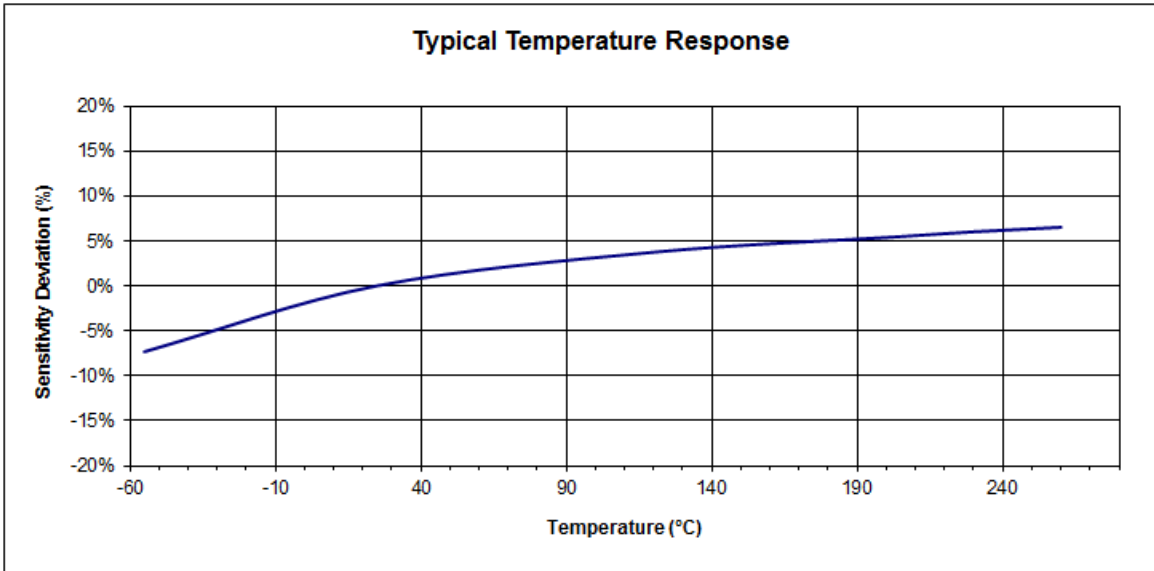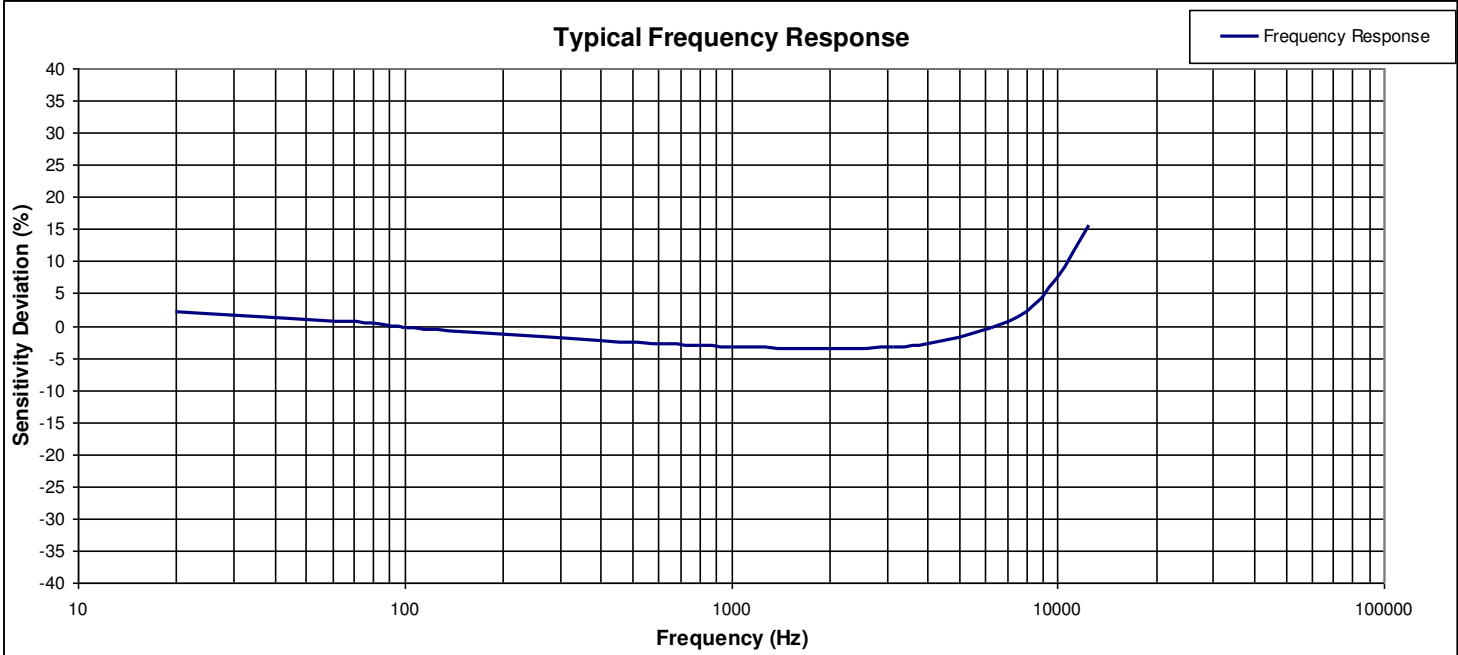

ORDERING INFORMATION

PART NUMBERING Model Number

7531A-XX
|_____ Optional Dash Number

Dash Number	Thread Options
-01	M2.5 x 0.45 6g
-02	#5-40 UNF-2B
-03	Case Isolated

Example: 7531A
Model 7531A, No Option

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.